


T6


T6 7+8+9



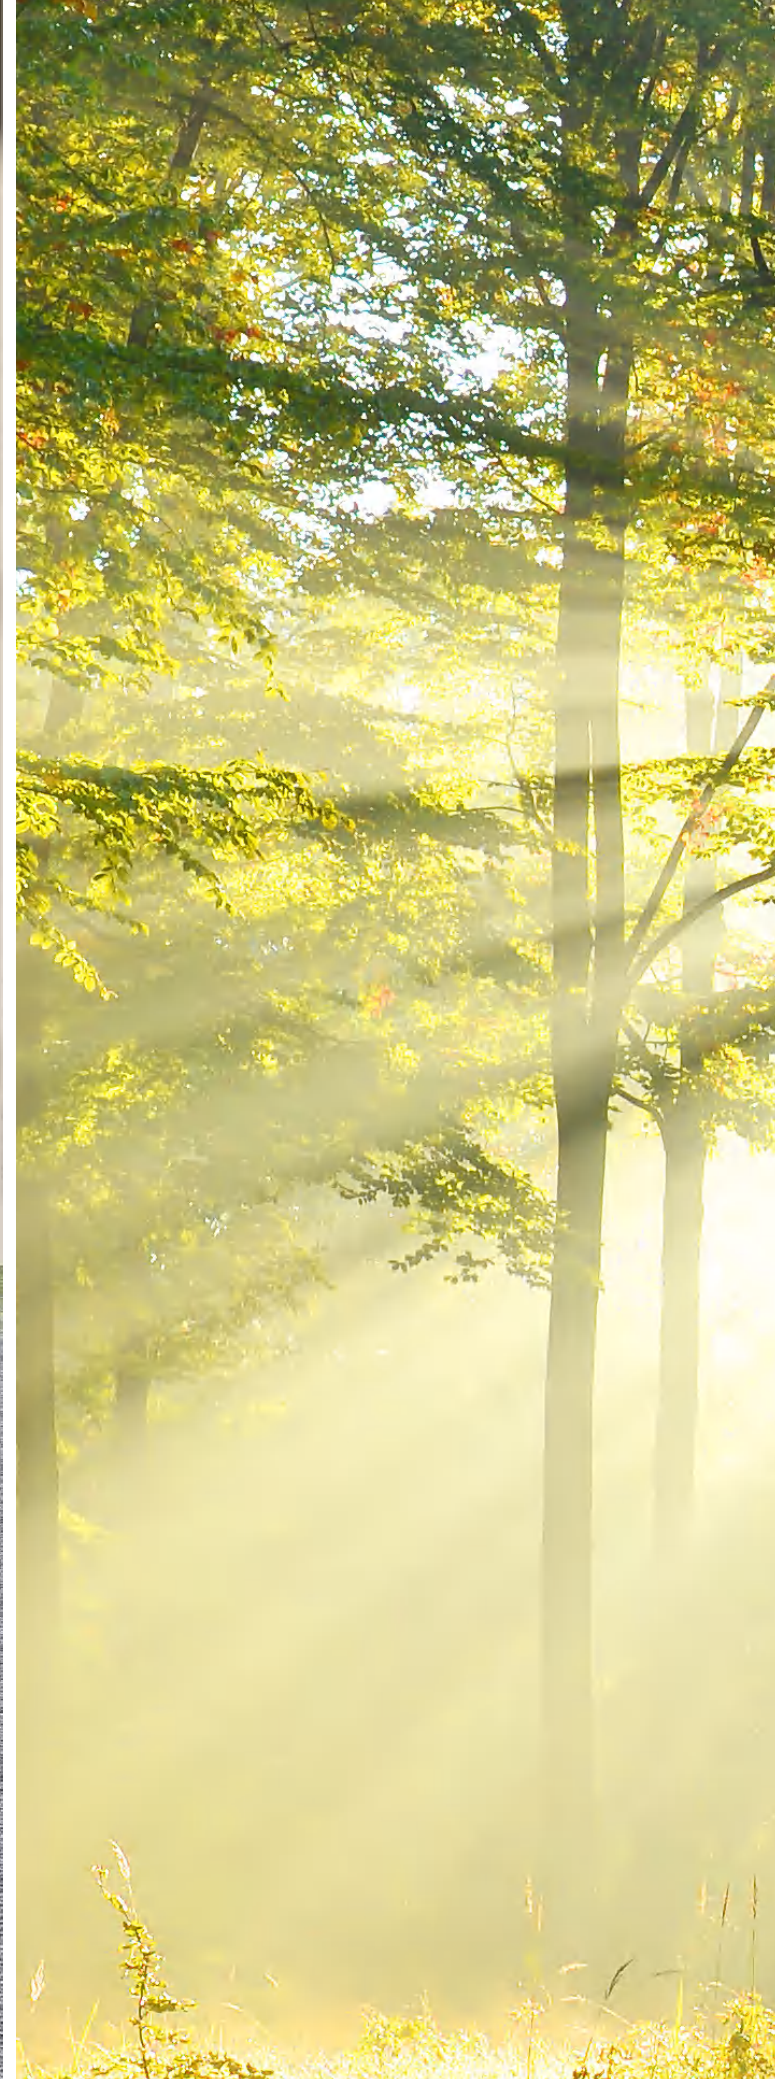

T6 10+11+12




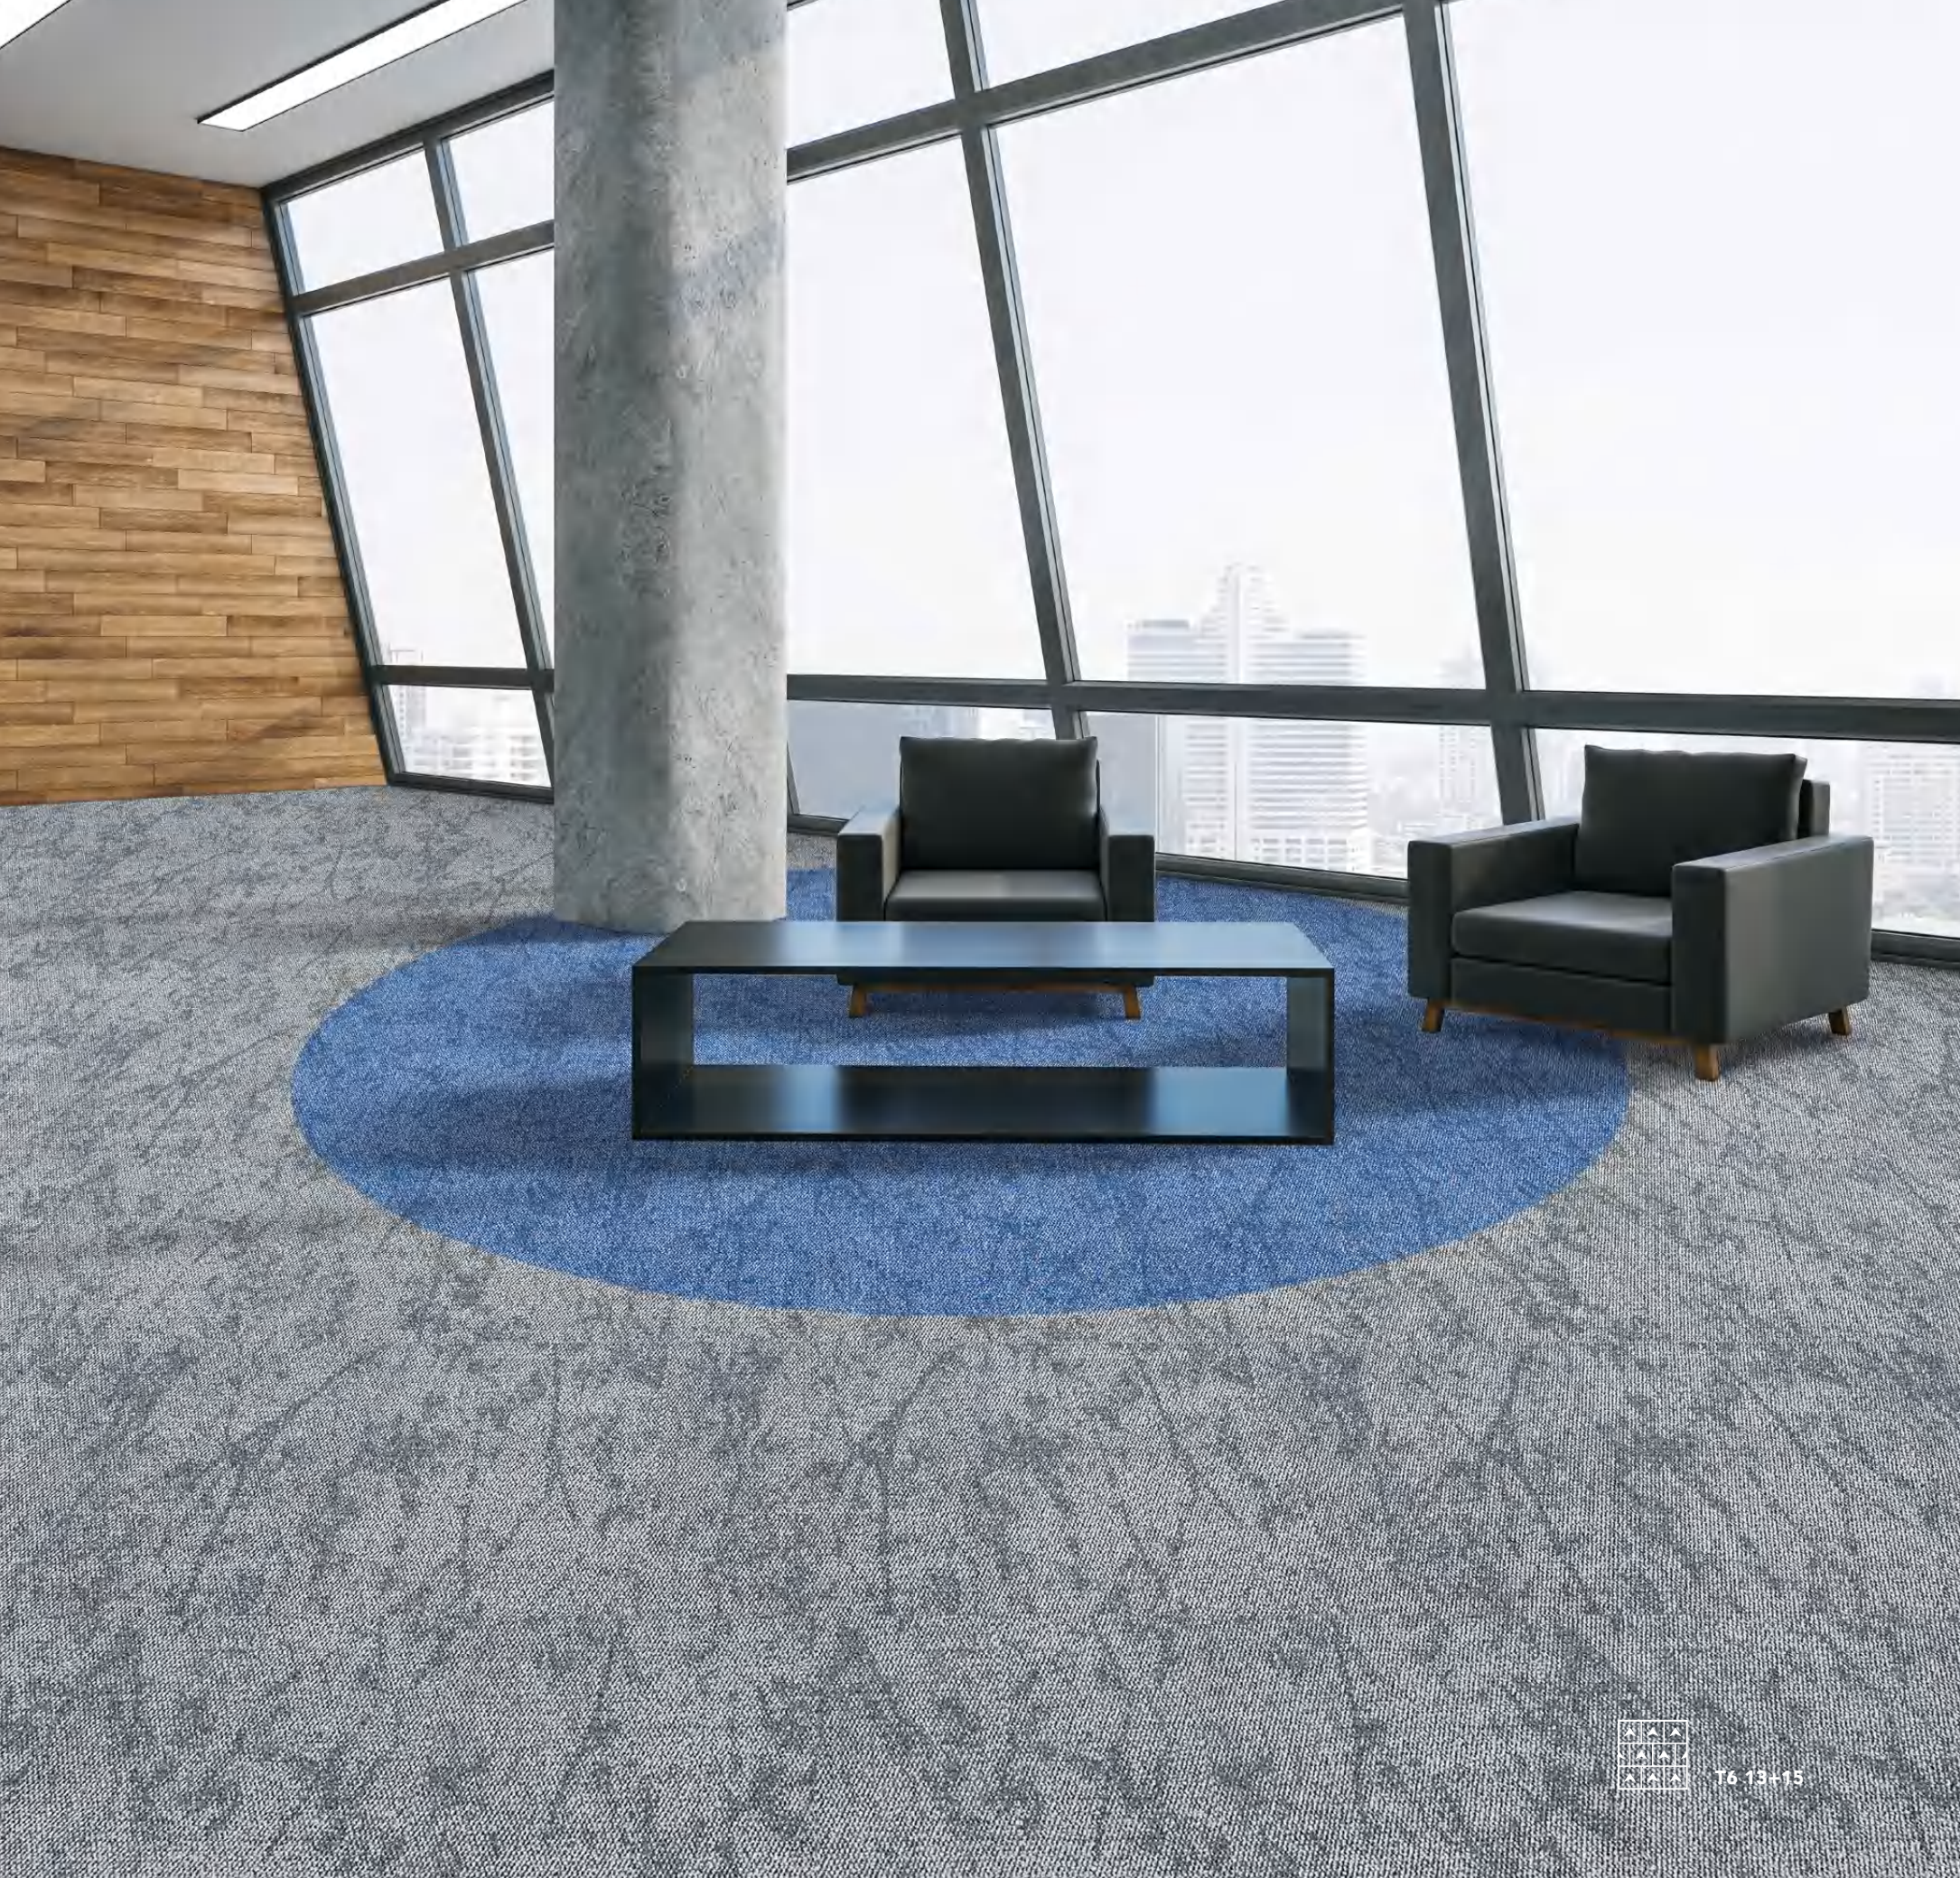

May time be gentle,
may time never
be wasted,
and may all
your luck
come by chance.



T6 13+15

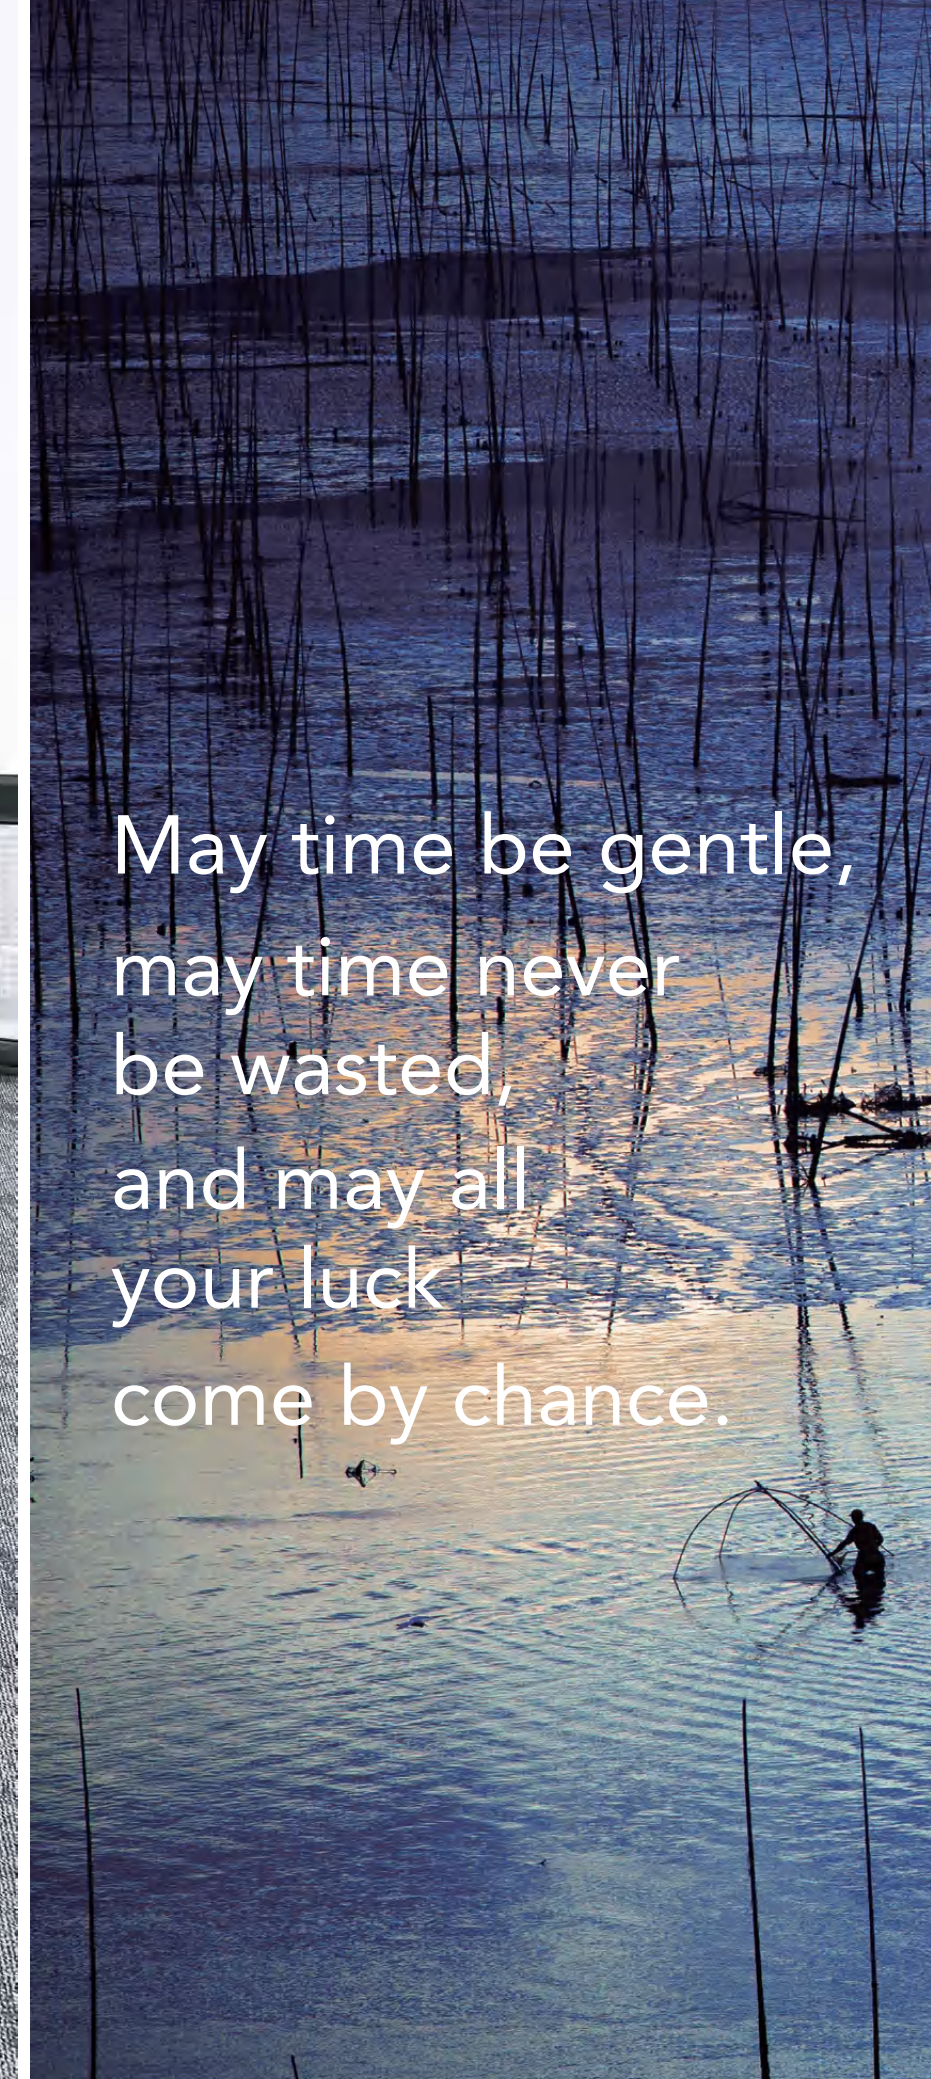



T6 4+5+6




T6 SERIES



T6 1



T6 2




T6 3




T6 4



T6 5



T6 6



T6 7




T6 8



T6 9



T6 10




T6 11



T6 12



T6 13



T6 14



T6 15



Ecover®

Declare.



INSTALLATION METHODS



Quarter Turn



Ashlar



Monolithic



Brick

Style Name:	T6
Construction:	Multi-level loop
Yarn:	Universal Nylon6 & Plencolor Nylon6
Color System:	100% Solution Dyed
Gauge:	1/12
Stitches:	9.5 per inch
Pile Weight:	16 oz/yd ²
Pile Height:	3.3mm-6.1mm (±0.5mm)
Backing:	UltraEco
Tile Size:	50cm×50cm
Total Thickness:	6.0mm(±0.5mm)
Total Weight:	(3250±100)g/m ²
Area of Use:	Heavy Commercial
Flammability:	Passes (ASTM E 648-17) Class I Passes (GB 8624-2012) B ₁
Smoke Density:	Passes ASTM E 662 Less than 450
Static Propensity:	Passes AATCC-134≤3.5kV
Static Control:	Life-of-the carpet Static Protection
Formaldehyde Purification:	Passes (JC/T 1074-2008) Class I