


OEM BY GIMIG

Impression LVT



Why Choose Us

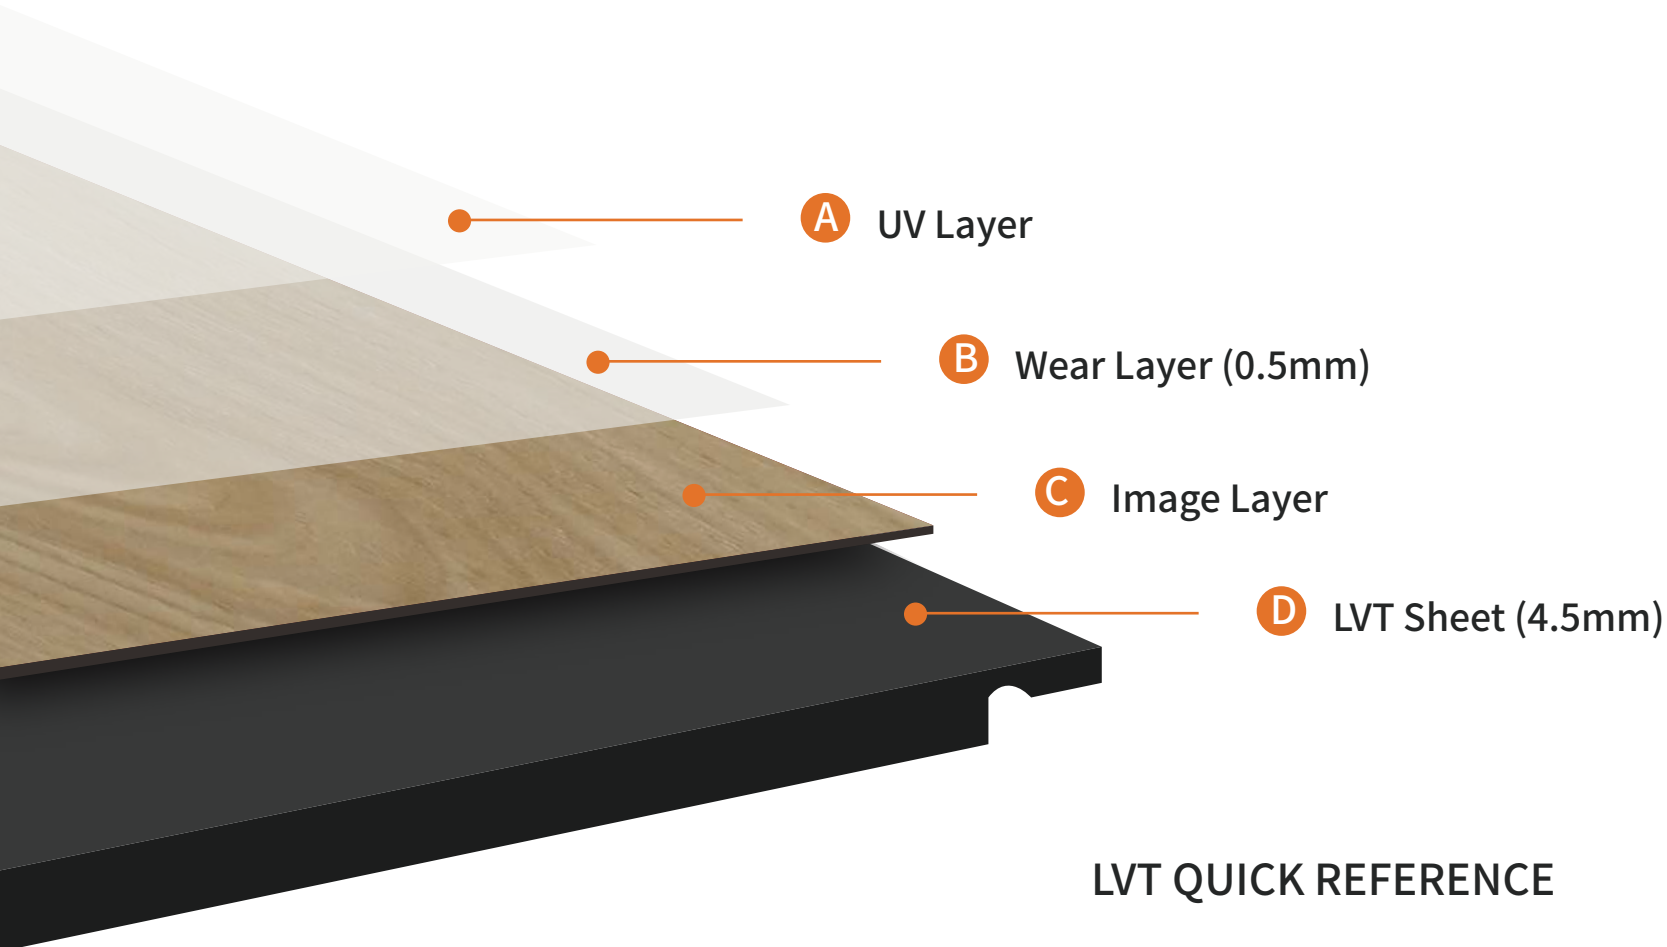

LVT QUICK REFERENCE

DESCRIPTION

Luxury vinyl tile is a combination of stone powder and plastic, belongs to the branch in PVC floor big class, it is a kind of new-style light body ground adornment material that is very popular in the world today, also call light body ground material". It is a kind of PVC resin powder, plasticizer, stone powder, stabilizer and other raw materials, after extrusion, hot press, tempering, pouring film and other processes made into the new light body decoration materials.

AUTHENTICATION



ENVIRONMENT

The business development of good companies is equally relevant to protecting the entire planet. Urban Connect is not only committed to providing innovative and creative ground products, but also to reduce environmental hazards.



ADVANTAGE

- ◎ Health and environmental protection
- ◎ Waterproof and skid-proof
- ◎ Super flexible and no noise
- ◎ Fire resistant
- ◎ Suitable for various installation environment
- ◎ Easy and fast installation
- ◎ 100% Formaldehyde-free
- ◎ 100% No heavy metal
- ◎ 100% Waterproof
- ◎ 100% Phthalates free
- ◎ Recyclable material
- ◎ Non- toxic, Odorless



Impression

SKU#: 22701

Color: Ice Oak

LVT FLOORING

SIZE: 1220*182*5.0mm

Wear Layer: 0.5 mm

Micro Bevel



Impression

SKU#: 22702

Color: Washed Wood
LVT FLOORING

SIZE: 1220*182*5.0mm

Wear Layer: 0.5 mm

Micro Bevel



Impression

SKU#: 22703

Color: Light Walnut
LVT FLOORING
SIZE: 1220*182*5.0mm
Wear Layer: 0.5 mm
Micro Bevel



Impression

SKU#: 22704

Color: Fresh Oak

LVT FLOORING

SIZE: 1220*182*5.0mm

Wear Layer: 0.5 mm

Micro Bevel



Impression

SKU#: 22705

Color: Shore Oak

LVT FLOORING

SIZE: 1220*182*5.0mm

Wear Layer: 0.5 mm

Micro Bevel



Impression

SKU#: 22721

Color: Warm Cement

LVT FLOORING

SIZE: 610*305*5.0mm

Wear Layer: 0.5 mm

Micro Bevel



Impression

SKU#: 22722

Color: Dark Concrete

LVT FLOORING

SIZE: 610*305*5.0mm

Wear Layer: 0.5 mm

Micro Bevel





22701
Ice Oak



22702
Washed Wood



22721
Warm Cement



22703
Light Walnut



22704
Fresh Oak



22705
Shore Oak



22722
Dark Concrete

CLEANING AND MAINTENANCE

- Use a lightweight vacuum or broom to remove fine dirt and debris that builds up on flooring throughout each day.
- Use a mop with a little scrub brush, a little soap, water, and mop brings your vinyl plank flooring back to life in no time at all. Rinse your floor after you use a soap/water mixture.
- Strong, abrasive cleaners and wired brushed scrubbing pads should not be used on vinyl plank flooring.
- Fill a bucket with plain water and run your damp mop over your vinyl plank floor.
- Some vinyl plank floors may benefit from a yearly coat is good to protect against wear and tear.
- Read the introduction before installation.



CHARACTERISTIC



Environment Friendly



High Dimensional Stability



Antiskid & Wear-resisting



Scratch resistant



100% Waterproof



Easy To Install



For Floor Heating



Reduce Noise

TECHNICAL DATA

TEST	STANDARD	RESULT
Size		1220*182mm/610*305mm
Overall Thickness	ISO 24346	5.0mm
Wear Layer	ISO 24340	0.5mm
Formaldehyde Content Test	GB18580	ND
Heavy Metal Content	GB 18586	ND
Phthalates Content	GB/T 22048	ND
Flame Retardant Grade	GB 8624	B1
Abrasion	BS EN 13329	≥4000
Antiskid	DN51130	≥R9
Castor Chair Test	EN 425/ISO 4918	25000Pass
Resistance to Light	ISO 105-B02	Level 6
Static Load	ASTM F970	≤0.13mm
Residual Indentation	ASTM F1914	≤0.18mm
Dimensional Stability	ISO 23999	≤±0.15%
High Temperature Warping	ISO 23999	≤1mm
Low Temperature Warping	Internal	≤1mm
Peeling Strength	GB34440	average ≥75N/50mm, min≥70N/50mm
Length	ISO 24337	+/-1mm
Width	ISO 24337	+/-0.15mm
Thickness	ASTM F386 ASTM F387	+/-0.15mm
Squareness	ISO 24337	qmax ≤ 0.25mm
Installation gap	ISO 24337	Click product: average ≤ 0.1mm and max ≤ 0.2
Height difference	ISO 24337	≤ 0.15mm