


Forest Whisper

21307+21308+21309






2.13.10 + 2.13.11 + 2.13.12

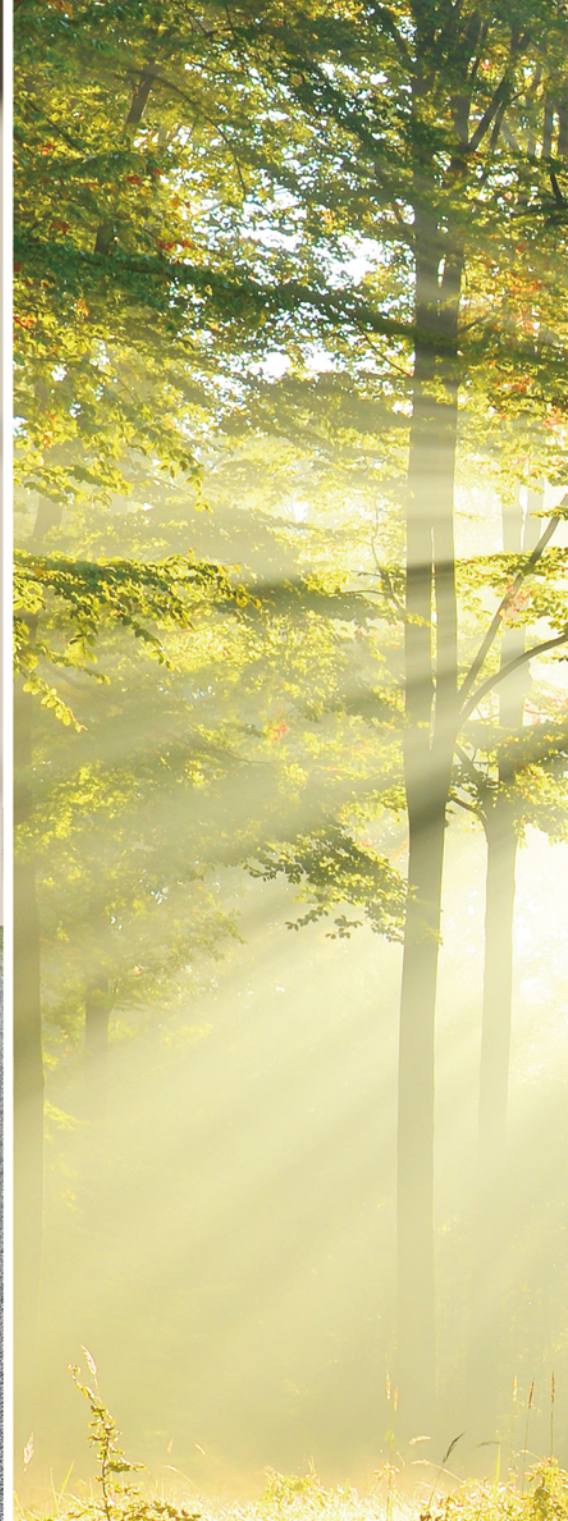



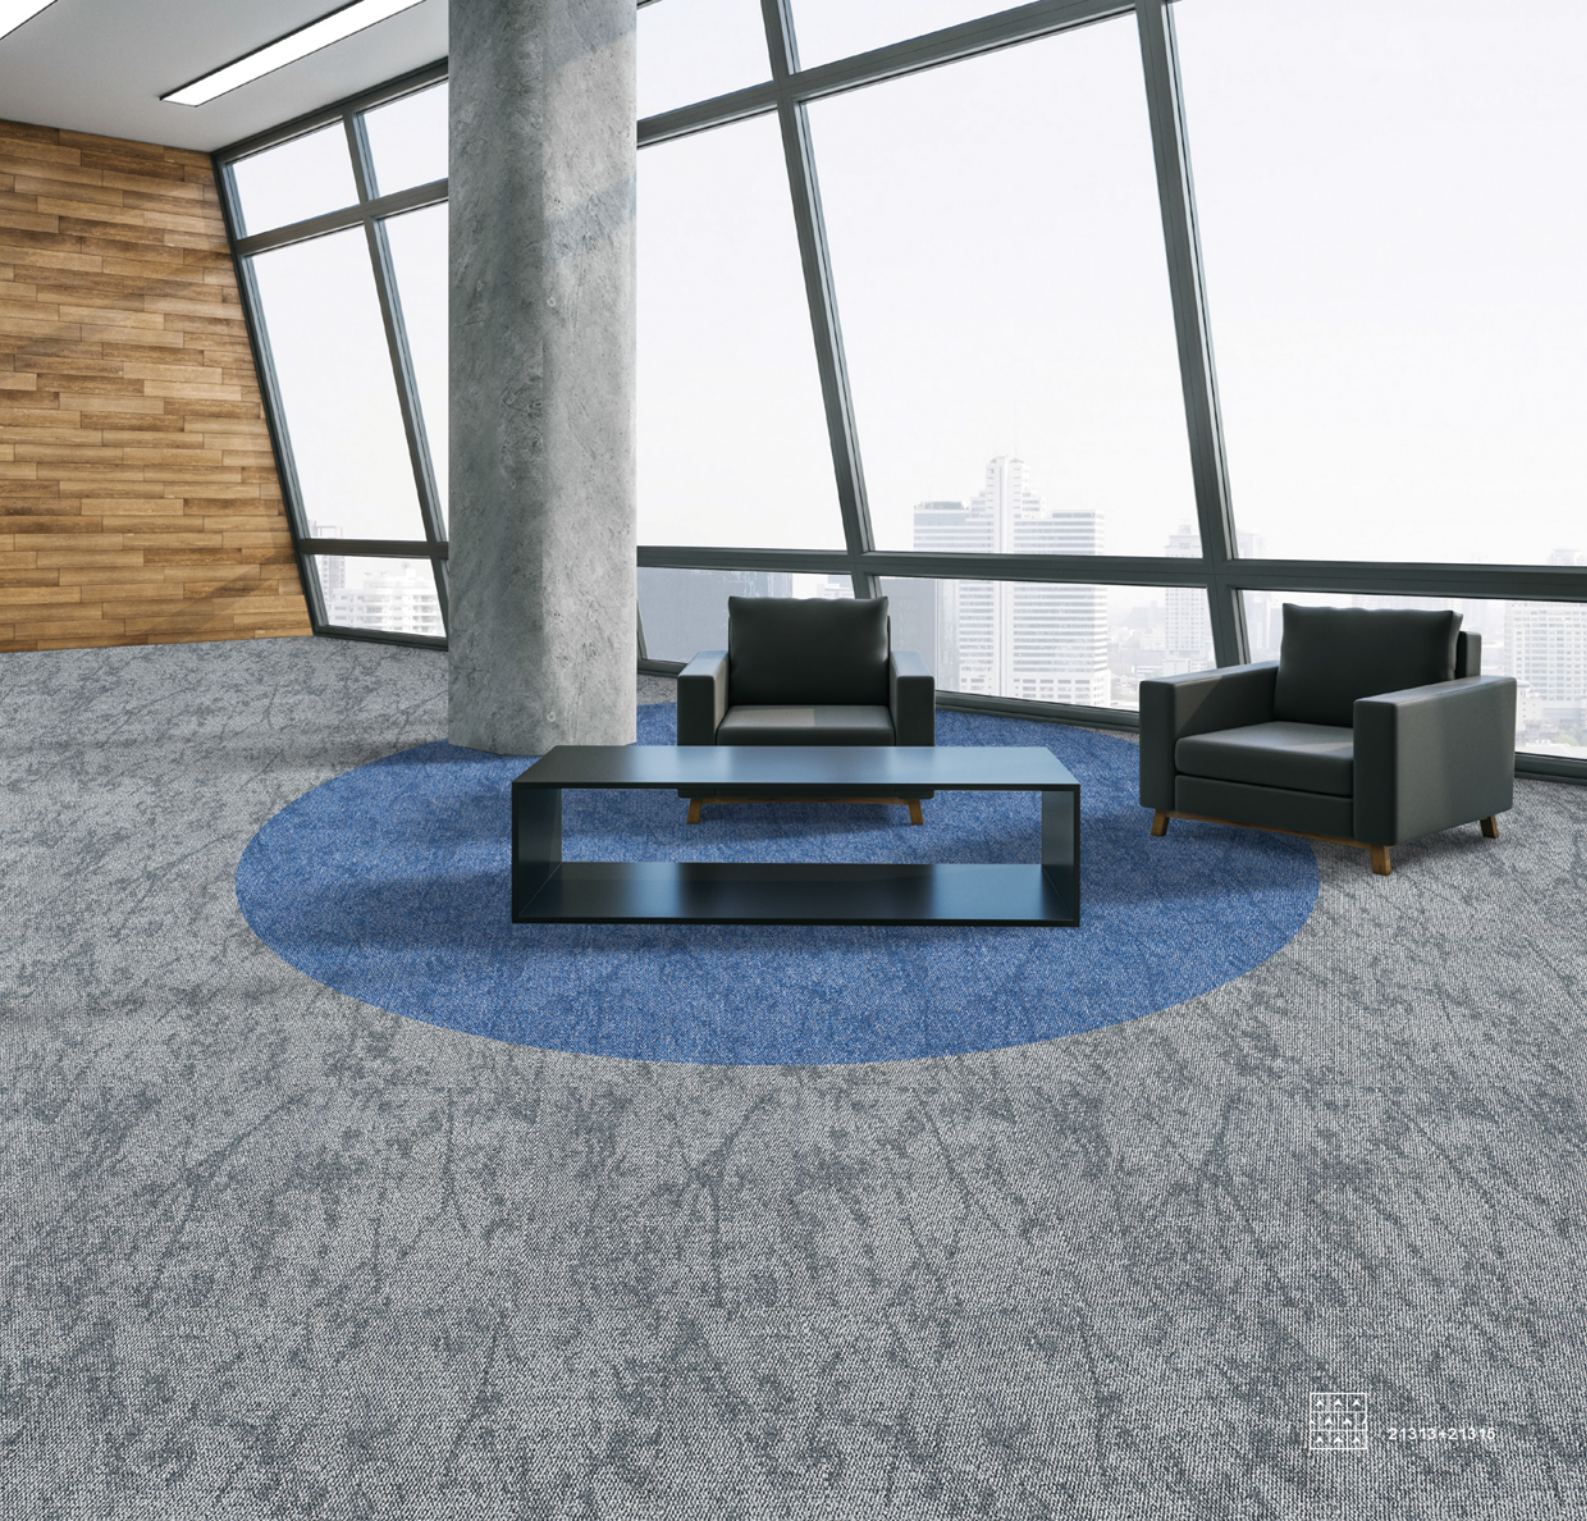


May time be gentle,
may time never
be wasted,
and may all
your luck
come by chance.




21313+21315



Forest Whisper SERIES




21301 Dune



21302 Dune Solar



21303 Solar




21304 Stone




21305 Stone Amber




21306 Amber




21307 Mist




21308 Mist Sky




21309 Sky




21310 Pebble




21311 Pebble Leaf




21312 Leaf



21313 Slate



21314 Slate Ocean



21315 Ocean



Ecover®

Declare.



EPD
INTERNATIONAL EPD SYSTEM



INSTALLATION METHODS



Quarter Turn



Ashlar



Monolithic



Brick

Style Name:

Forest Whisper

Construction:

Multi-level loop

Yarn:

Universal Nylon6 & Plencolor Nylon6

Color System:

100% Solution Dyed

Gauge:

1/12

Stitches:

9.5 per inch

Pile Weight:

16 oz/yd²

Pile Height:

3.3mm-6.1mm (±0.5mm)

Backing:

UltraEco

Tile Size:

50cm×50cm

Total Thickness:

6.0mm(±0.5mm)

Total Weight:

(3250±100)g/m²

Area of Use:

Heavy Commercial

Flammability:

Passes (ASTM E 648-17) Class I

Passes (GB 8624-2012) B₁

Smoke Density:

Passes ASTM E 662 Less than 450

Static Propensity:

Passes AATCC-134≤3.5kV

Static Control:

Life-of-the carpet Static Protection

Formaldehyde Purification:

Passes (JC/T 1074-2008) Class I



21304+21305+21306